


lead

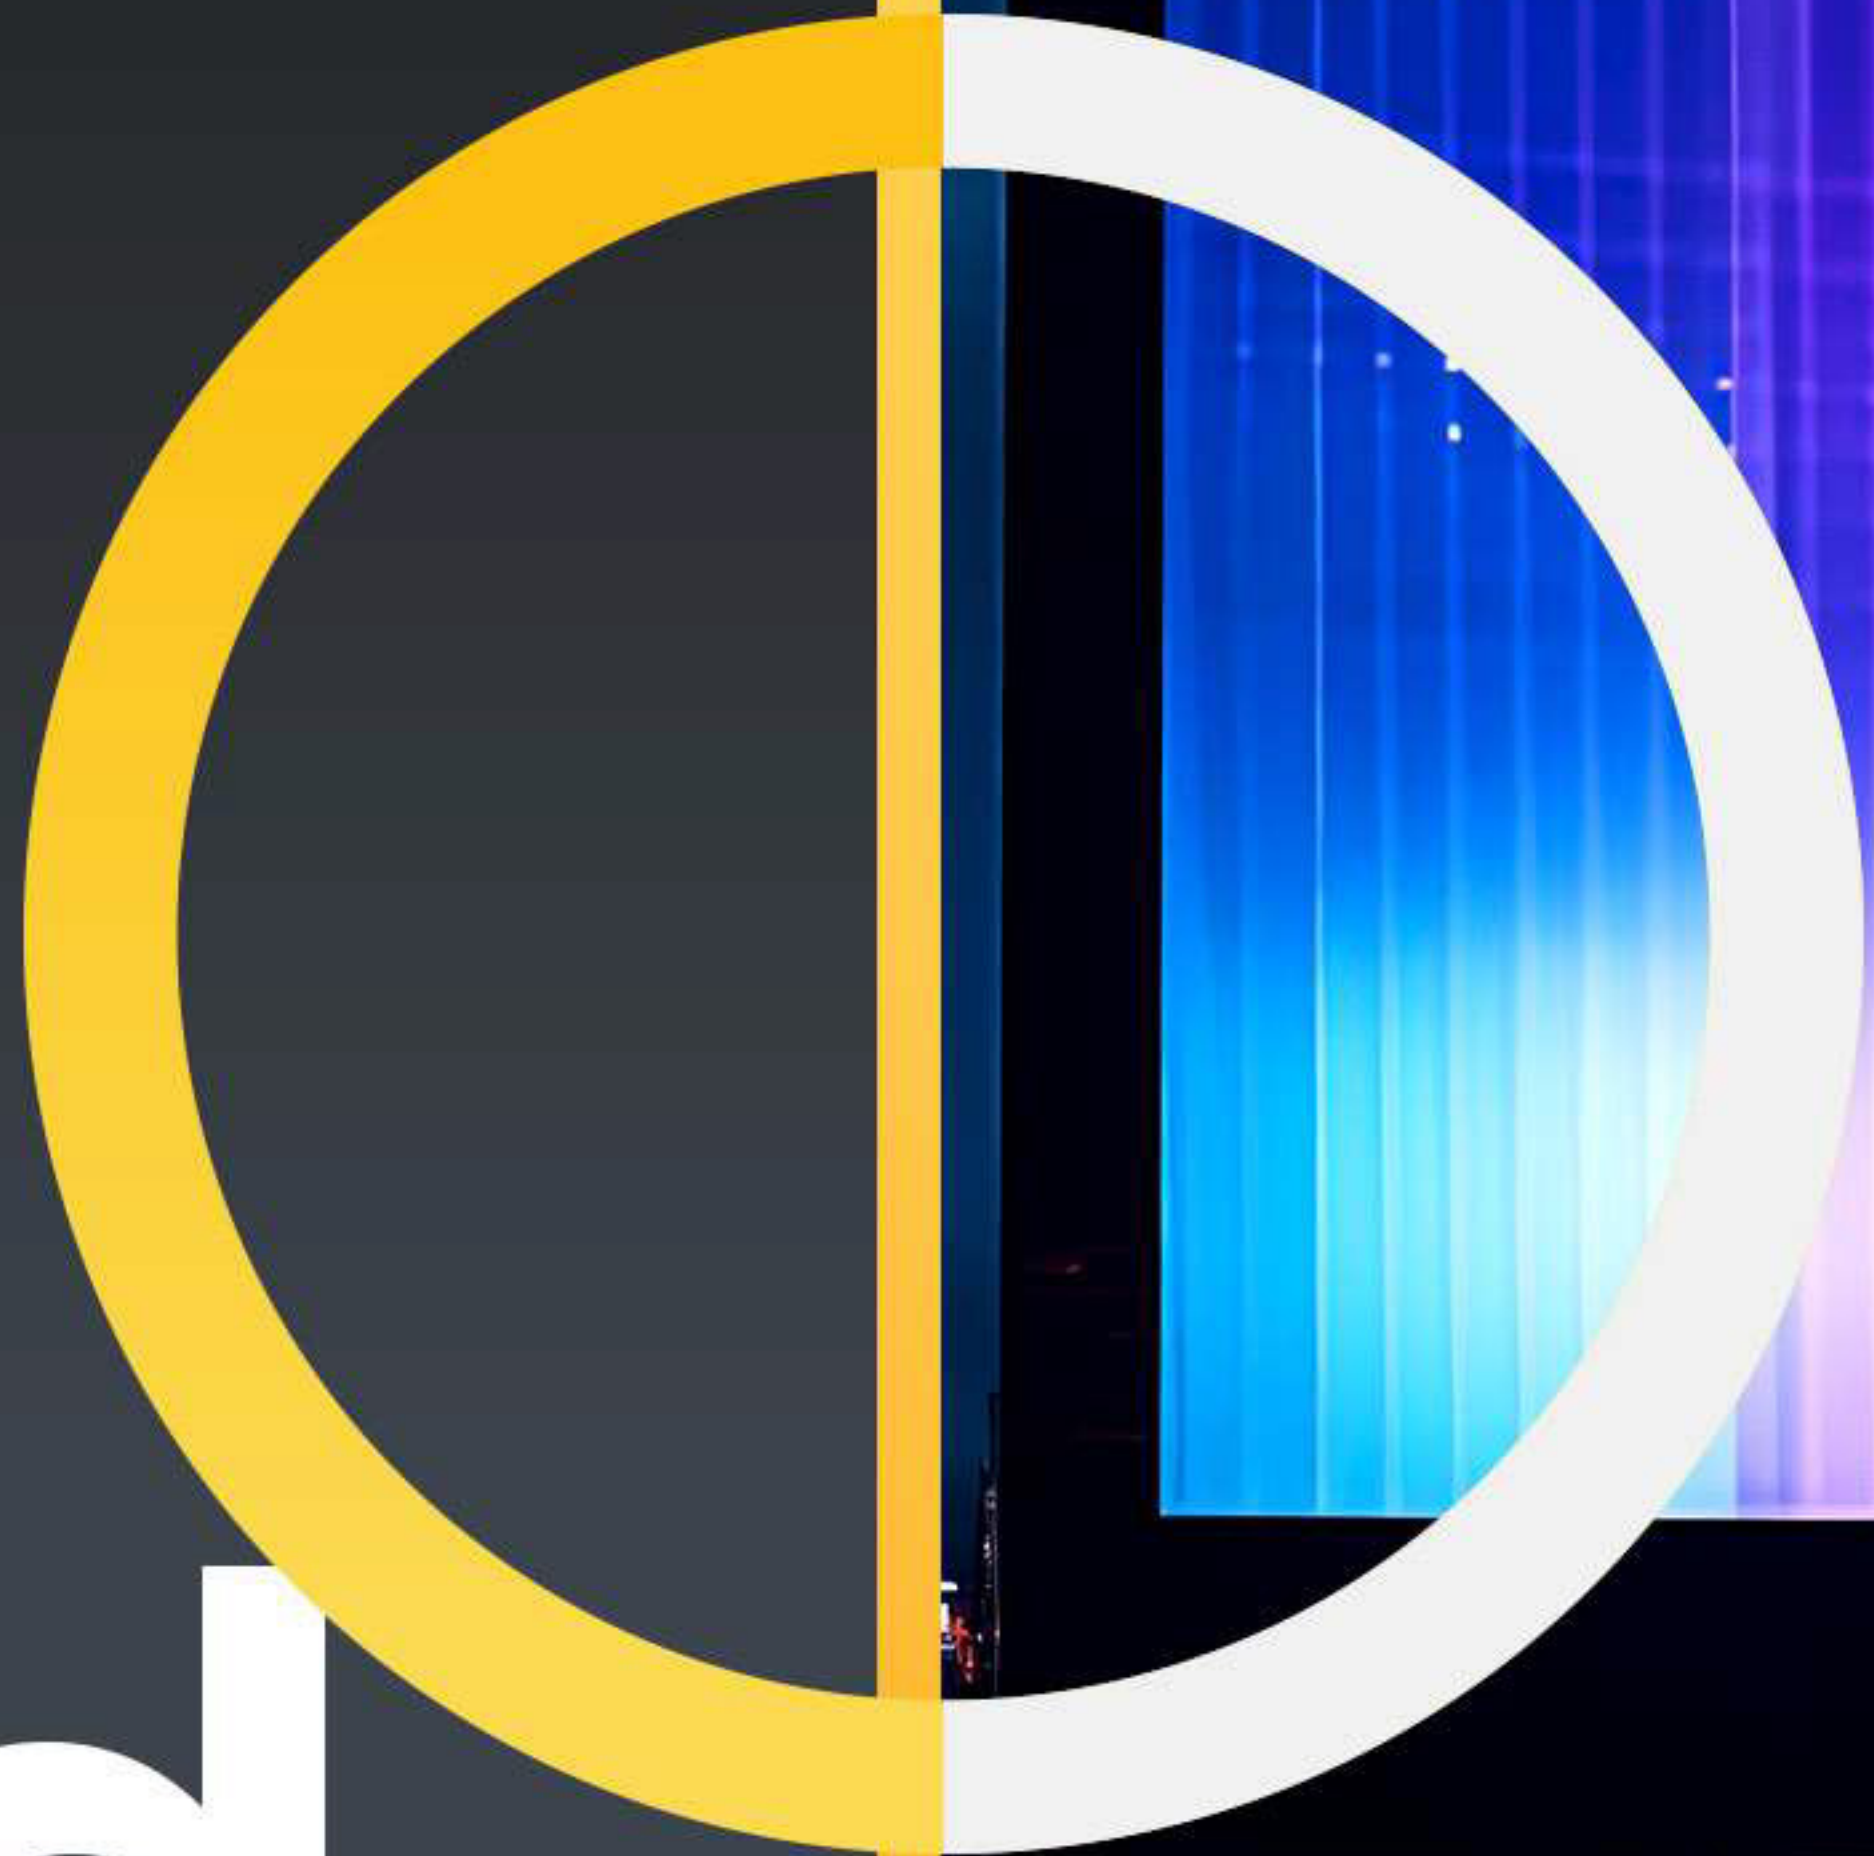

**APCX  
EVENTS**

# Lead inventory

---





# indoor led screen



**APEX  
EVENTS**

# LED INDOOR SCREEN 2.6

SIZE: 500 x 500 x 75 mm  
RESOLUTION: 192x192 (PIXELS)

**Excellent curving capabilities**  
The NT series supports concave and convex connection to create various shapes and build a more creative stage

**G-PRO SERIES**  
INDOOR : TGP1.5 / TGP2.6 / TGP2.9 / TGP3 /

- 3840Hz High refresh rate
- 4000nits Maximum brightness
- Edge protection Anti-collision design
- 0.1s-ms1 Installation Easy and fast installation
- Modular design Front and rear maintenance
- Creative shape Concave and convex connection

Curved Lock -7.5° to +10° adjustable (2.5° per unit)

**G-PRO SERIES**

Curved Lock -7.5° to +10° adjustable (2.5° per unit)

## LED Splicing screen

Products are designed with high precision, strength, convenience and color performance standards to meet the needs of various usage environments. The display panel adopts a universal indoor and outdoor design to meet various needs of customers. Support the latest display technologies such as 3D display and HDR. The internal connection of the product adopts the wireless material connection method, which has higher reliability. The fixing buckle prevents the display panel from falling off or loosening during transportation or installation, which is highly secure.

**APEX  
EVENTS**

# Model P 2.97



**SIZE: 500 x 500 x 75 mm**  
**RESOLUTION: 168x168 (PIXELS)**

Series LPO-2.9 to LPO-10.4 models are high-brightness outdoor LED video walls with pixel pitches from 2.9 mm to 10.4 mm, suitable for temporary events and permanent installations even in direct sunlight.

- Hang, stack, or wall mount
- Power Consumption, Maximum (watts) - 180
- Line Voltage - 100~240v AC, 50/60Hz
- Viewing Angle (50% of brightness) - >150° horizontal; >130° vertical
- Refresh Rate - 1920/3000 Hz



# outdoor led screen



**APEX  
EVENTS**

# clarke AVL

## Model P 3.9

### G-PRO SERIES

Premium Indoor/ Outdoor Rental Cabinet



**SIZE: 500 x 500 x 75 mm**  
**RESOLUTION: 128x128 (PIXELS)**

- Hang, stack, or wall mount
- Power Consumption, Maximum (watts) - 180
- Line Voltage - 100~240v AC, 50/60Hz
- Viewing Angle (50% of brightness) - >150° horizontal; >130° vertical
- Refresh Rate - 1920/3000 Hz



**led poster**



**APEX  
EVENTS**

# clarke AVL



## Specification (PT11.8 indoor GOB LED poster)

### 1. Module Specs

Pixel Pitch	Size	LEDs Brand	Configuration	Resolution(physical)
1.86mm	320mm x 160mm	Kinglight	SMD 3in1 (GOB)	172dots x 86dots

### 2. Cabinet Specs

Model	Size	Pixel Pitch	Configuration	Resolution(physical)
PT11.8 LED Poster	640mm x 1920mm	1.86mm	SMD 3in1 (GOB)	344dots x 1032dots

### 3. Screen Specification

NO.	Items	Parameters
1	Part No.	PT11.8 GOB LED Poster
2	Pixel configuration	SMD1515 3in1
3	Pixel pitch	1.86mm
4	Screen Size	640mm(W) x 1920mm(H)
5	Cabinet Quantity	6 pcs
6	Cabinet material	aluminum
7	Panel weight	32 kg per Cabinet
8	Brightness	≥600 nits
9	viewing angle	140/140
10	recommended view distance	≥2m
11	Ingress protection	IP65/IP43
12	Life time	≥100,000 Hours
13	Power consumption for the Whole screen:	Max.: 500W/sqm Average: 180W/sqm
14	Operating Environment	Temperature: -20°C ~ +60°C; Humidity: 10% ~ 95%
15	Electrical Parameter	Input voltage (AC)
16		110~230V/AC(±10%)
16		Refresh rate
16		≥ 3840Hz
14		Scan Mode
14		1/48 scan
17		Input power frequency
17		50/ 60Hz
18	Control system	Control Method
18		Synchronization display(to computer display)
19		Control system constitution
19		Main controller + Branch controller + DVI card + CAT5/Fiber
20		Video input
20		DVI, HDMI, PAL/NTSC/SECAM;S-Video;VGA;RGB;Composite; Video; SDI etc.
21		Transmission distance
21		Multi mode fiber < 500m, Single mode fiber < 30Km, internet cable < 100m



# interactive kiosk



**APEX**  
EVENTS

# clarke AVL

## 55" Digital Kiosk



55" Digital Kiosk is the ideal solution for a variety of environments, such as hospitality, retail, airports & public spaces. Featuring Ultra HD resolution, 178°/178° wide-angle viewing, 450-nit brightness, 5000:1 contrast ratio, 24/7 operation, capacitive touch to deliver messages with vivid clarity in a sleek, slim design. Photo and video files can be played back using the in built Android system and 16GB of internal memory.

- Capacitive multi-touch interactive display
- Freestanding slim design
- Protective glass fascia & built-in speakers
- 55" Ultra HD Portrait Display
- Integrated Android system
- Supports superior video content & applications

**Smart Kiosk Digital Signage  
Display Floor Stand 32 Inch  
Touch Screen  
W Camera - MX-AFDS32**



**Touch Screen: Yes 10 Point Captive touch**  
**Camera built-in: 10mp**  
**WiFi: Yes**  
**Panel's Dimension: 32" LCD FHD IPS, LED Backlight**  
**Resolution: 1080\*1920**  
**Brightness: 400cd/m2**  
**Battery Standby: 6-5 hours**  
**USB port: Yes**  
**Power Supply: ac 240~100v 4A 60/50Hz**  
**Power Consumption: 180W**  
**Ram: 4gb DDR3**  
**Internal Storage: 128gb**  
**OS: Android 9.0**  
**Video format: MPEG-1,MPEG-2,MPEG-4 support up to 1080p**  
**Audio format: MP3/WMA/AAC etc.**  
**Speaker: Enabled**  
**Language: English**  
**Device Dimension (LxHxD): 2100 x 871**  
**Weight: 25kg**





# interactive screens



**APEX**  
EVENTS

## Interactive Display

UDX-65S2 Datasheet

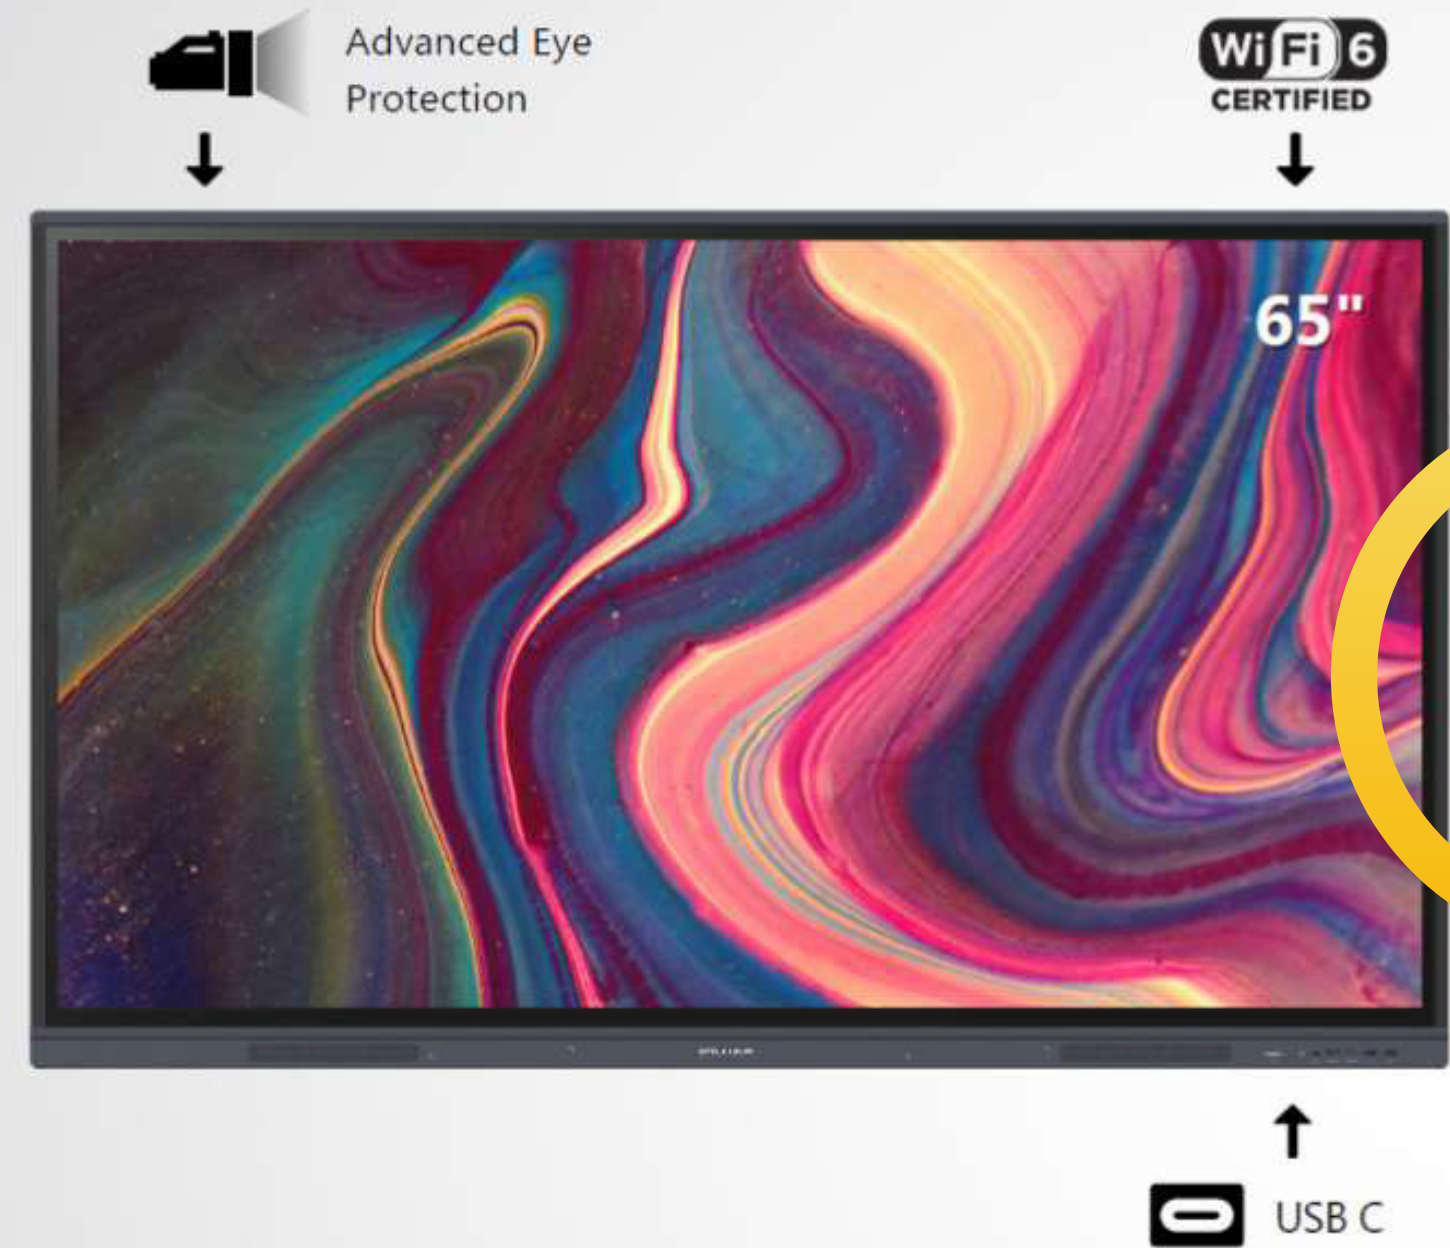

Windows + android

DISPLAY	
Screen Type	D-LED
Aspect Ratio	16:9
Size	65 inch
Resolution	3840(H) x 2160(V)
Response Time	8ms
Refreshing Frequency	60Hz
Display colour	1.07B (10bit)
Pixel Pitch	0.372(H) x 0.372(V)
Brightness	350cd/m <sup>2</sup>
Contrast Ratio (TYP)	1200:1
Viewing Angle	178° (H/V)
Lifetime	50,000 hours

DISPLAY CONNECTORS	
HDMI-In / HDMI-Out	3/ 1
VGA	1
Audio-In / Audio-Out	1 / 1
USB-A 2.0 / USB-A 3.0	1 / 4
USB-C (Display / Touch / Power 65W)	1
USB-B (Touch)	2
SPDIF	1
RS232	1
Lan Port (RJ45)-In / Out	1/ 1

ANDROID SYSTEM	
System Version	Android 11*
RAM	4GB/ 8GB*
ROM	32GB/ 64GB*

ENVIRONMENTAL CONDITIONS	
Operating Temperature	0°C - 40°C
Operating Humidity	10%~90% RH Non-Condensing
Storage Temperature	-20°C~60°C
Storage Humidity	10%~90% RH Non-Condensing

CAMERA & MIC (Optional)	
Camera	Built-in 13MP
Mic	6 array microphone (0~8m)

WIRELESS*	
Wi-Fi	802.11ax (Wi-Fi 6)
Bluetooth	5.0

AUDIO	
Speaker Type	Built-in Speaker
Output Power	16W X 2

POWER	
Power Requirements	AC100 V ~ 240 V, 50-60 Hz
Standby Power	≤0.5W
Overall Power (typ.)	200W

PC MODULE (Optional)	
Type	Detachable PC module
Model	CT-22 Series
CPU	Intel®Core™ i5 /i7
RAM	4 GB / 8 GB*
SSD (optional)	128GB / 256 GB*
Graphics	Intel®HD Graphics
Networking	10/100/1000M
Wi-Fi	802.11ac (2.4 GHz/5 GHz)
Operating System	Windows 10 / Windows 11
Bluetooth	4.2
USB 3.1/USB 3.0 /USB 2.0	2 / 1 / 1
LAN (RJ45)	1
HDMI Output	1
Line Out / Mic In	1 / 1

PHYSICAL SPECIFICATIONS	
Dimension(L x H x D)	(1488.4 x 896.7 x 87.2)mm
Dimension (package) L x W x H	(1628 x 208 x 1005)mm
Net Weight	34.95 Kg
Gross Weight	44.7 Kg
VESA	600 x 400 mm

# Professional Display QEN Series 82"



## Display

**Diagonal Size**  
82"

**Resolution**  
3,840 x 2,160

**Brightness (Typical)**  
300

**Viewing Angle (Horizontal/Vertical)**  
178/178

**Colour Gamut**  
72%

**H-Scanning Frequency**  
30~81kHz

**V-Scanning Frequency**  
48~75Hz

**Panel Type**  
3 Bezel-less

**Pixel Pitch (HxV)**  
0.15675(H) x 0.47025(V)

**Contrast Ratio**  
5,000:1

**Response Time**  
6ms(Typ), 15ms(Max)

**Brightness**  
2.3%

**Maximum Pixel Frequency**  
594Mhz

**Contrast Ratio (Dynamic)**  
Mega



**led dance  
floor**




**APEX  
EVENTS**

# LED DANCE FLOOR VIDEO WALL

SIZE: 500 x 500 x 75 mm

RESOLUTION: 128x128 (PIXELS)

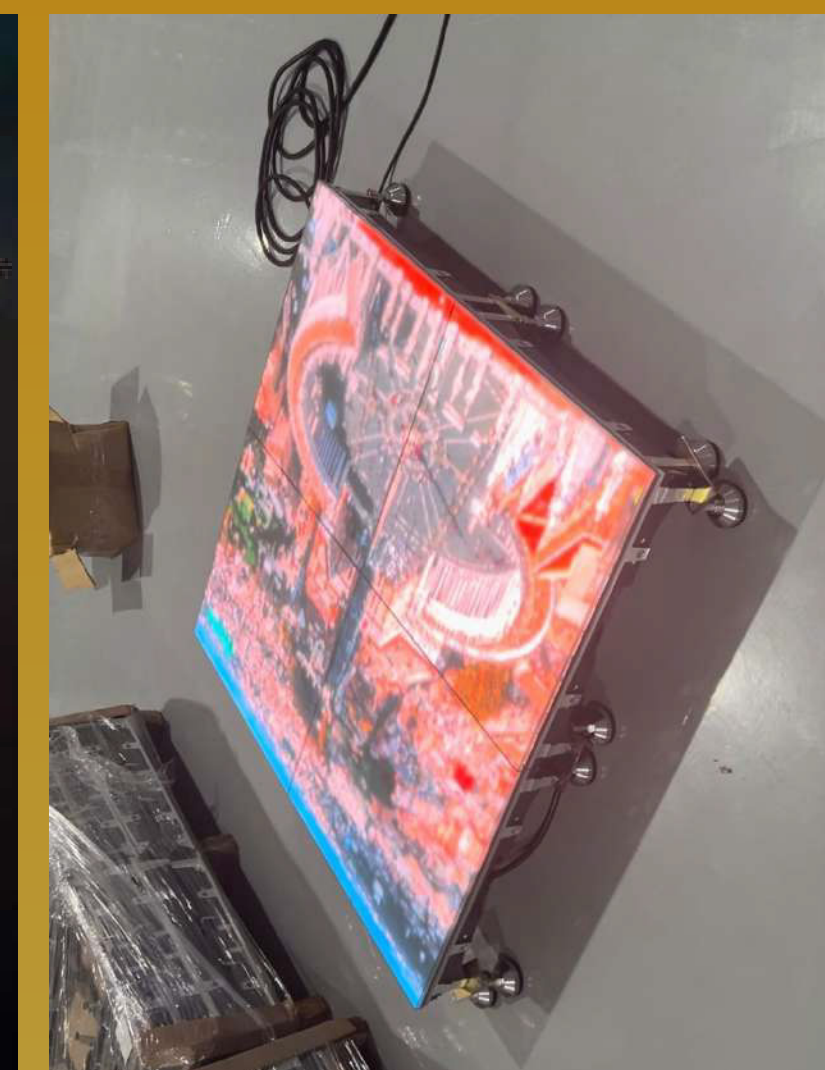

## LED Splicing screen

Led dance floor video wall is a kind of full color led video floor screen, with the strength of lightweight, flexible, easy installation and maintenance, and can be with interactive effects. The cabinet size is 500x500mm, 11kg/panel, the available pixel pitch are P3.9

**APEX  
EVENTS**



**SIZE: 500 x 500 x 75 mm**

- Power Consumption, Maximum (watts) - 50
- Line Voltage - 100~240v AC,
- Multi Colour Lighting (RGBW)



**processors**



**APEX  
EVENTS**

# Kommander T3

---



Multimedia sever synchronization, complete the pixel-to-pixel display of the large screen.  
Built-in sync card, nanosecond synchronization clock, achieve multi-servers or multi-graphics synchronization.  
Master and backup sync in real time and automatically seamless switch.

# KOMMANDER BOW GUARD

---



Bow Guard

8\*DP inputs (4 Masters & 4 Backups), 16\*DVI outputs, standard resolution 2×2 splitting. Masters Backup switching, manual switching. Kir automatically detects abnormal signal in multimedia software. Multi-connection frames synchronization, and multiple Bow Guard are used synchronously in large events. Real-time monitoring of all outputs. Using web control instead of installing software. Not limited by operating system and operating platform. Pre-stored scene mode, one-click switch for multi- and single screen. Support OSD image and text overlay, users can set the position of characters, background and other parameters. Editing the plan without affecting the real-time output. Seamless switching, there is no black screen, no flicker, and no jamming in the whole process. Real-time monitoring of hardware temperature, voltage, hardware version, running status, fan speed and other information. Supports online self-inspection of the device to achieve rapid location of equipment faults.

# NOVASTAR MCTRL 4K



The MCTRL4K is stable, reliable and powerful, dedicated to providing a best visual experience. It can be mainly used such as concerts, live events, Olympic Games and various sports centers.

- Supports HDR function, both in HDR10 and HLG standards, which can greatly enhance the image quality of the display, presenting more clear and vivid
- Supports individual Gamma adjustment for RGB when the bit depth of input source is 10-bit or 12-bit, which effectively controls image non-uniformity under low grayscale and white balance offset to improve image
- Low latency: Less than 1 ms (when the start position of image is )
- Supports 3D function when working with the 3D emitter EMT200 and 3D glasses, allowing you to experience 3D display
- In multi-card mode, the MCTRL4K can be used as two controllers, allowing the images of two input sources to be displayed on the screen at the same



# Pixelhue P20



Pixelhue P20, similar to the P10, utilizes FPGA-based high-performance image enhancement architecture and real 4K60p 4:4:4 10-bit internal video processing. It offers dual working modes, versatile 4K connectivity, high-quality video processing, flawless image mosaic, various transition effects, and more, making it suitable for small to medium-sized live events and fixed installations. The P20 supports up to 7 layers (3x 4K@60Hz layers and 4x 2K@60Hz layers, or 4x 4K@60Hz layers) and allows users to freely arrange the layout of layers. It supports up to 128 presets, high-resolution image capture from live inputs and outputs, and advanced DSK capabilities, including free conversion between SDR, HDR10, and HLG. Additionally, the P20 features 10G optical fiber ports for long-distance signal transmission, ensuring signal stability and reducing transmission costs. The P20 is exceptionally easy to operate, offering various control options including full-featured front panel buttons, a 5-inch graphical LCD, versatile event controllers, and event management software. Designed for applications requiring the highest stability and uptime, the P20 supports different backup methods to ensure uninterrupted operation. Rigorous drop tests, shock and vibration tests, and thermal tests ensure the P20's durability in any environment or event scenario.

# 4K PRIME PRO NOVASTAR



The Novastar 4K Prime Pro is a high-performance Android-based LED multimedia player designed to deliver ultra-smooth 4K playback, advanced content management, and reliable 24/7 operation for professional LED displays. Built for speed and stability, it integrates seamless playback and transmission functions, ensuring crisp visuals and flawless performance across all commercial environments. When connected to cloud-based publishing and monitoring platforms, the 4K Prime Pro allows users to remotely schedule, manage, and control LED screens from any Internet-connected device, providing exceptional flexibility, convenience, and real-time oversight for digital signage applications.

- Provides 20 x Ethernet outputs and 4 x optical fiber outputs, with loading capacity up to 13,000,000 pixels
- Support 12 x layers
- A variety of inputs: 1\*12G-SDI , 1\*DP 1.2 , 4\*HDMI 1.3, 2\*HDMI 2.0(4k Resolution), 2\*OPT, 1\*USB3.0
- Audio input and output
- Self-adaptive OPT 1 for either video input or sending card output
- EDID management supported
- Up to 256 user-defined presets supported

# NovaStar™ H2



## Available Cards

4xDVI\_H

4xHDMI\_H

1xHDMI2.0\_H

1xDP1.2+1xHDMI2.0\_H

IP 2xRJ45\_H

4x3G SDI\_H

12G SDI Input Card\_H

2xVGA+2xCVBS\_H

4xVGA\_H

2xFiber+16xRJ45\_H

1xHDMI1.3+2xRJ45\_H

20xRJ45\_H

## Description

4x DVI Input Card

4x HDMI Input Card

Input Card 1x HDMI2.0

Input 1x DP1.2 + 1x HDMI2.0

Card

IP Camera Input Card 2x RJ45

3G-SDI Input Card 4x

12G SDI Input Card 1x


2x VGA Input Card + 2x CVBS

4x VGA Input Card

16x Ethernet Output Port and

2x Optical Ports

# Magnimage W4000

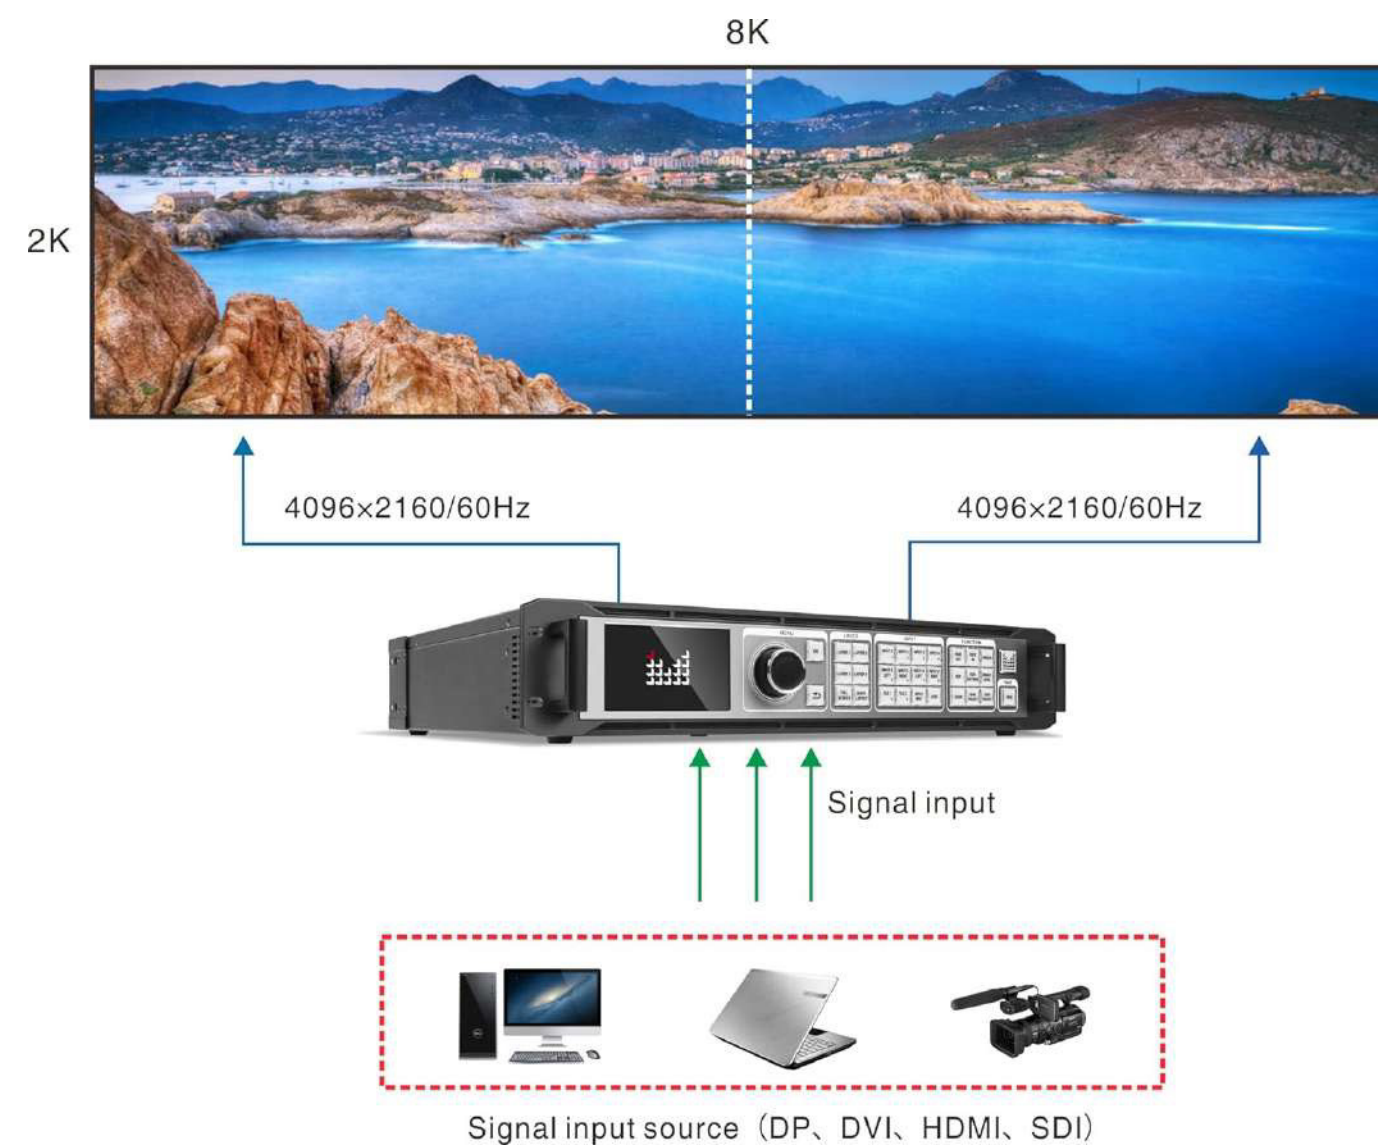

## Features:

- 8KX2K output mosaic:
- 2 groups of output, each group has 4 DVI and 1 HDMI D Different work modes: Mosaic mode: 8Kx2K input/output pixel to pixel displa  
Switcher mode: 4K Preview, seamless switchingBackup mode: input signal hot backup or manually backup, seamless

# NOVASTAR VX 1000



The VX1000 is NovaStar's new all-in-one controller that integrates video processing and video control into one box. VX1000 can be widely used in applications such as, stage control systems and fine-pitch applications.

- Loading Capacity = 6.5 million pixels
- Layers = 3x 4K×1K
- Input Connectors = 1x 3G-SDI  
2x HDMI 1.4  
2x DVI (HDMI 1.4)  
1x OPT1
- Control Connectors = 1x Ethernet Port  
2x USB (input & output)  
1x GENLOCK (IN & LOOP)

# NOVASTAR VX 600



The VX600 is NovaStar's new all-in-one controller that integrates video processing and video control into one box. VX1000 can be widely used in applications such as, stage control systems and fine-pitch applications.

- Loading Capacity = 3.9 million pixels
- Layers = 3x 4K×1K
- Input Connectors = 1x 3G-SDI  
2x HDMI 1.4  
2x DVI (HDMI 1.4)  
1x OPT1
- Control Connectors = 1x Ethernet Port  
2x USB (input & output)  
1x GENLOCK (IN & LOOP)

# NOVASTAR VX 4S



- Loading Capacity = 3.9 million pixels
- Input Connectors = 2x 3G-SDI  
1x HDMI 1.4  
2x DVI (HDMI 1.4)  
1x VGA
- Control Connectors = 1x Ethernet Port

# NOVASTAR TB30

---



## Features:

- 2 Gigabit Ethernet ports with a processing capacity of up to 650,000 pixels (1x Main, 1xBackup) (Maximum width/height: 4096 pixels)
- WLAN (stand-alone or as an access point)
- Stereo audio output
- 1x USB 3.0 (Type A): For importing media from a USB stick or performing firmware updates.
- Processor: Quad-Core ARM A55 1.8Ghz
- 1GB memory
- 16GB internal memory
- 2 connections for sensors (e.g. NovaStar NS060 light sensor)
- configurable via LAN/WLAN with ViPlex Express & NovaLCT
- Synchronised playback between multiple devices possible (synchronisation via NTP or GPS(4G module required))
- Supports the NovaStar 4G module (not included)

# Beetek Fibrer Extenders



Beetek are pushing the boundaries of high-resolution video transmission of up to 4K at 60Hz. Choose from single-core or multi-core options with multimode or single-mode fiber for distances up to 2000 meters. Features include EDID simulation, no delay or compression, and a robust dust proof design for reliable performance.



**Comfort Monitor**

**Fiber Optical  
Cable**



**Smart UPS**



**television**



**APEX  
EVENTS**

# Touch Screen Display



- Resolution of up 4K Ultra HD display
- Supports screen sharing
- Contrast ratio of 4000:1
- Viewing angle of 178-degree
- Multi-user functionality
- Supports remote conferencing
- Touch Screen functionality with inbuilt Wi-Fi
- Design integrated with HDMI, USB and RJ45 ports
- Support VESA mounting pattern
- 10W integrated speakers
- Password-based protection system
- Compatible with Apple AirPlay 2

## TV Dimension

24"

43"

55"

65"



## TV Dimension

32"

50"

55"

65"

85"

# tv stands



**APEX**  
EVENTS

# Teleprompter



**Desview T12S Teleprompter, 12.9 inch Metal Teleprompter, High Display Glass, Compatible with Smartphone/Tablet/ipad/Camera, Easy Assembly, Carry Case Included, Great Partner for Video Making**



**projectors**



**APEX  
EVENTS**

# Christie® Mirage HD20K-J 3DLP



## Specifications:

### Image

- **Brightness:** 18,000 ANSI lumens, 20,000 center lumens
- **Contrast:** 1600-2000:1 full field | 650:1 ANSI
- **Uniformity:** 80% brightness uniformity
- **Display**
- **Type:** 3DLP 0.95" DMD
- **Native resolution:** HD (1920 x 1080)
- **Frame delay:** As low as one frame
- **Lamp**
- **Type:** 3kW Xenon Bubble pre-aligned lamp module
- **Life:** 750 hours typical lamp life
- **Input (standard)**
- Slot 1-2 populated, standard: two Dual Link DVI-D (330 MHz) input cards (each has VGA (165 MHz) for 3D or dual input 3D compatibility) with HDMI 1.3 receiver
- Slot 3-4 unpopulated
- **Input (optional)**
- Analog
- Dual link DVI
- SD/HD-SDI
- Video Decoder
- Twin HDMI
- Signals
- HDTV formats VGA through to QXGA (2048 x 1536)
- Accepts all current 2D HDTV/DTV formats (optional input module may be required)
- HDMI 1.3 receiver supports mandatory HDMI 1.4a 3D modes of operation plus 24-144Hz triple flash 3D mode
- Multi-standard video decoder
- Horizontal and vertical scaling, all inputs

# EPSON G 7000 W

---



- Projection System: High-aperture Epson 3-chip 3LCD technology
- Native Resolution: WXGA (1280 x 800)
- Color Brightness: 6500 lumens<sup>1</sup>
- White Brightness: 6500 lumens<sup>1</sup>
- Size - projected distance: 50" – 300"




# screens



# Inflatable Theatre Screens

---

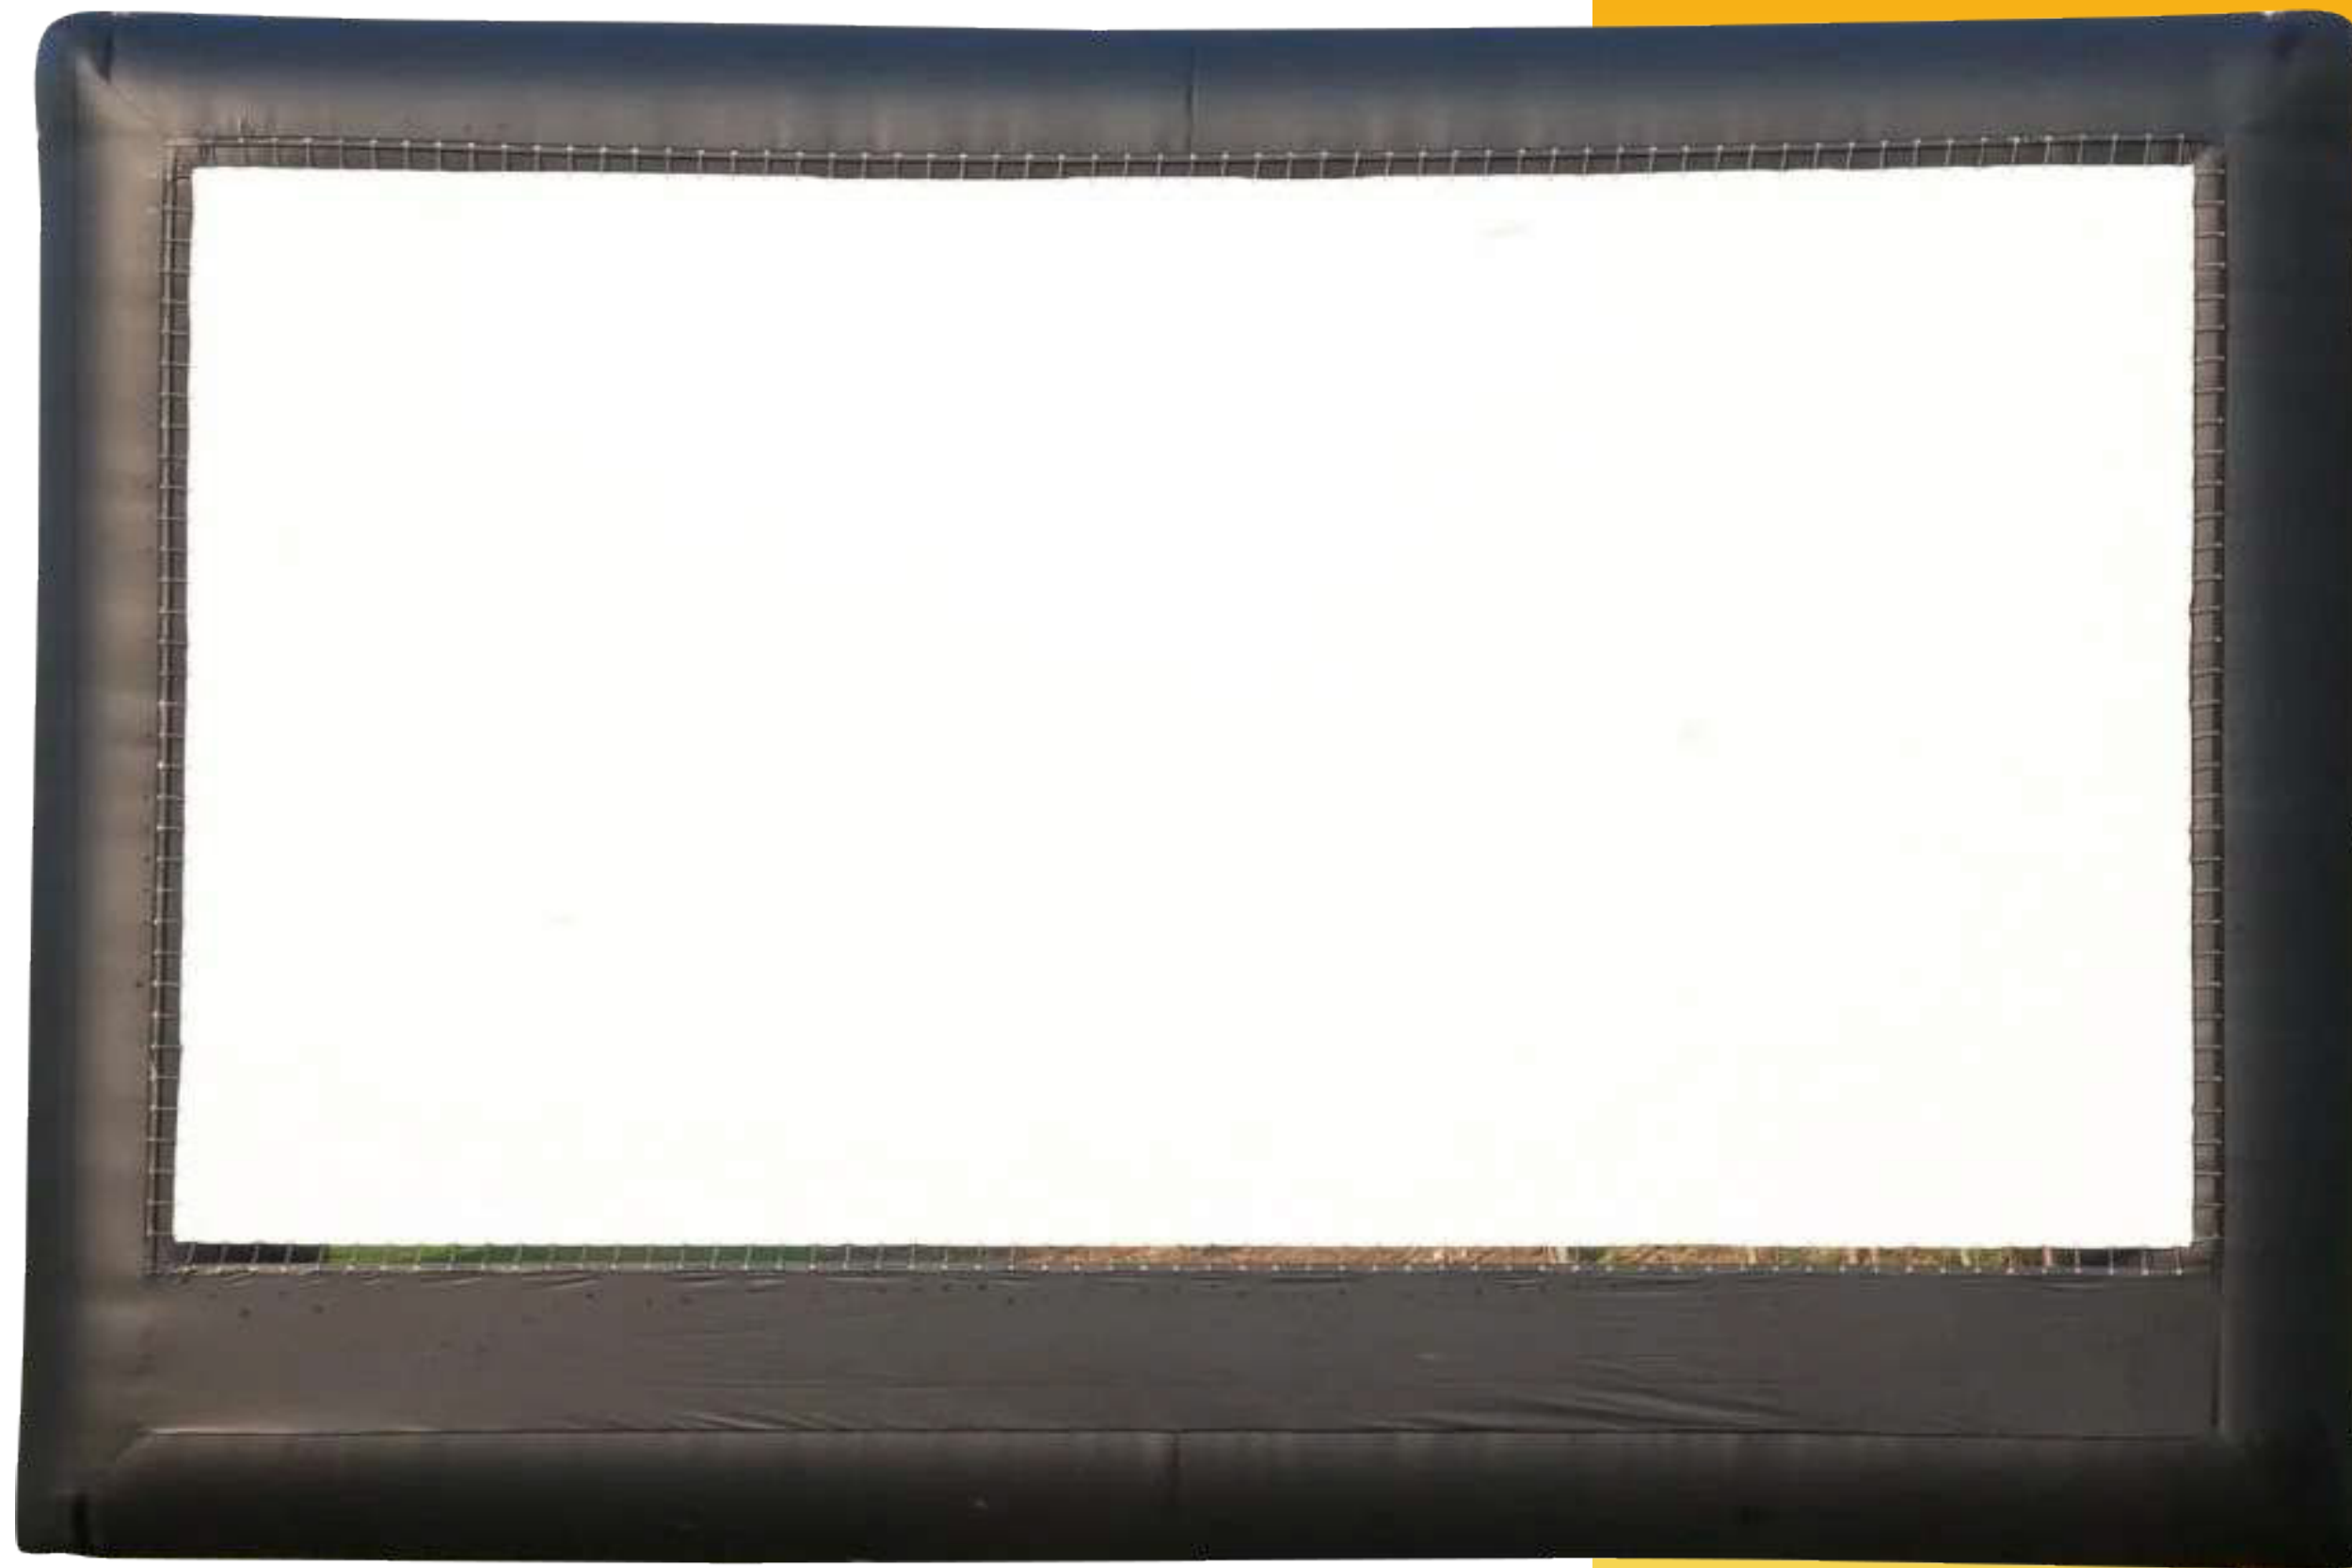

**Inflatable Theatre Screens: Cinematic Magic Under the Open Sky!** Immerse your audience in the magic of cinema with our large inflatable screens, perfect for projecting videos in grand outdoor settings. Choose from various sizes or consider our recommended options.

**Perfect for Outdoor Settings:** As outdoor theaters gain popularity, catering to crowds of any size, and the resurgence of drive-in cinemas becomes a trend, our inflatable screens offer a versatile solution for memorable movie experiences under the open sky.



**server**



**APEX  
EVENTS**

# RESOLUME SERVER



Arena expands on Avenue and has advanced options for projection mapping and blending projectors. Control it from a lighting desk and sync to the DJ via SMPTE timecode.

- **Live Video Mixing**  
Resolume puts you in charge. You can play your videos when you want, how you want. Forwards, backwards, scratch and adjust tempo to the beat. Mix and match your visuals quickly and easily and play Resolume like an instrument.




**laptops**



**APEX  
EVENTS**

# Alienware m16 R1

---

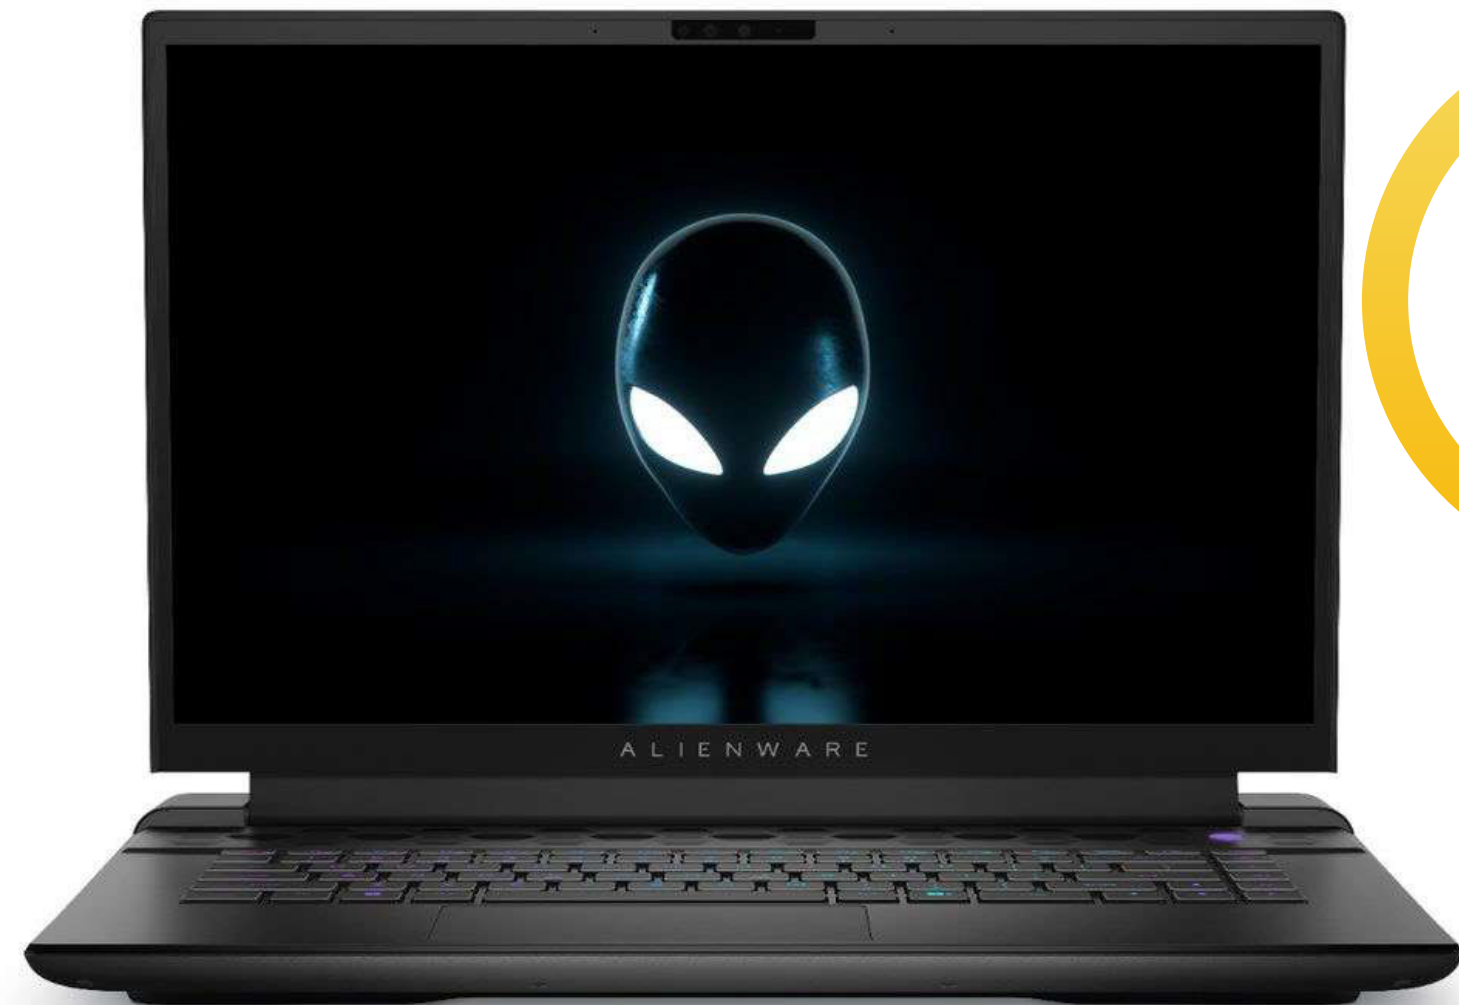

13th Generation Intel® Core™ i9-13900HX (36 MB cache, 24 core, up to 5.40 GHz)  
NVIDIA® GeForce RTX™ 4090, 16 GB GDDR6  
64 GB, 2 x 32 GB, DDR5, 5600 MHz XMP, non-ECC, dual-channel  
1 TB, M.2 2280, PCIe NVMe Gen4 x4, SSD, Class 40

# ASUS TUF Gaming A17



- **HIGH-POWER**  
AMD Ryzen™ 7 processor, GeForce RTX™ 30 Series Laptop GPU with up to 140W max TGP, and MUX Switch
- **STELLAR VISUALS**  
FHD 144Hz with Adaptive-Sync and an 83% screen-to-body ratio
- **PRODUCTIVITY ON THE GO**  
USB 3.2 Type-C support, DDR5-4800MHz RAM, and a 90Wh battery

# ASUS TUF Gaming A15

---



The TUF Gaming A15 excels at gaming, streaming, and everything in between with the latest AMD Ryzen CPU and GeForce GTX GPU. A superfast NVMe PCIe SSD speeds up load times, while an open SSD slot makes it easy to add terabytes more space.

- 15.6-inch FHD LED display
- AMD Ryzen 5
- 8GB memory/512GB SSD
- NVIDIA GeForce GTX 1650

# Asus ROG G513R

---



AMD Ryzen™ 7 6800H Mobile Processor (8-core/16-thread, 20MB cache, up to 4.7 GHz max boost)

NVIDIA® GeForce RTX™ 3060 Laptop GPU  
ROG Boost: 1752MHz\* at 140W (1702MHz Boost Clock+50MHz OC, 115W+25W Dynamic Boost)  
6GB GDDR6

- 16GB DDR5-4800 SO-DIMM
- Max Capacity:32GB
- Support dual channel memory




# special accessories



**APEX**  
EVENTS

# Prompter People ProLine StagePro 24" Carbon Fiber Presidential Teleprompter

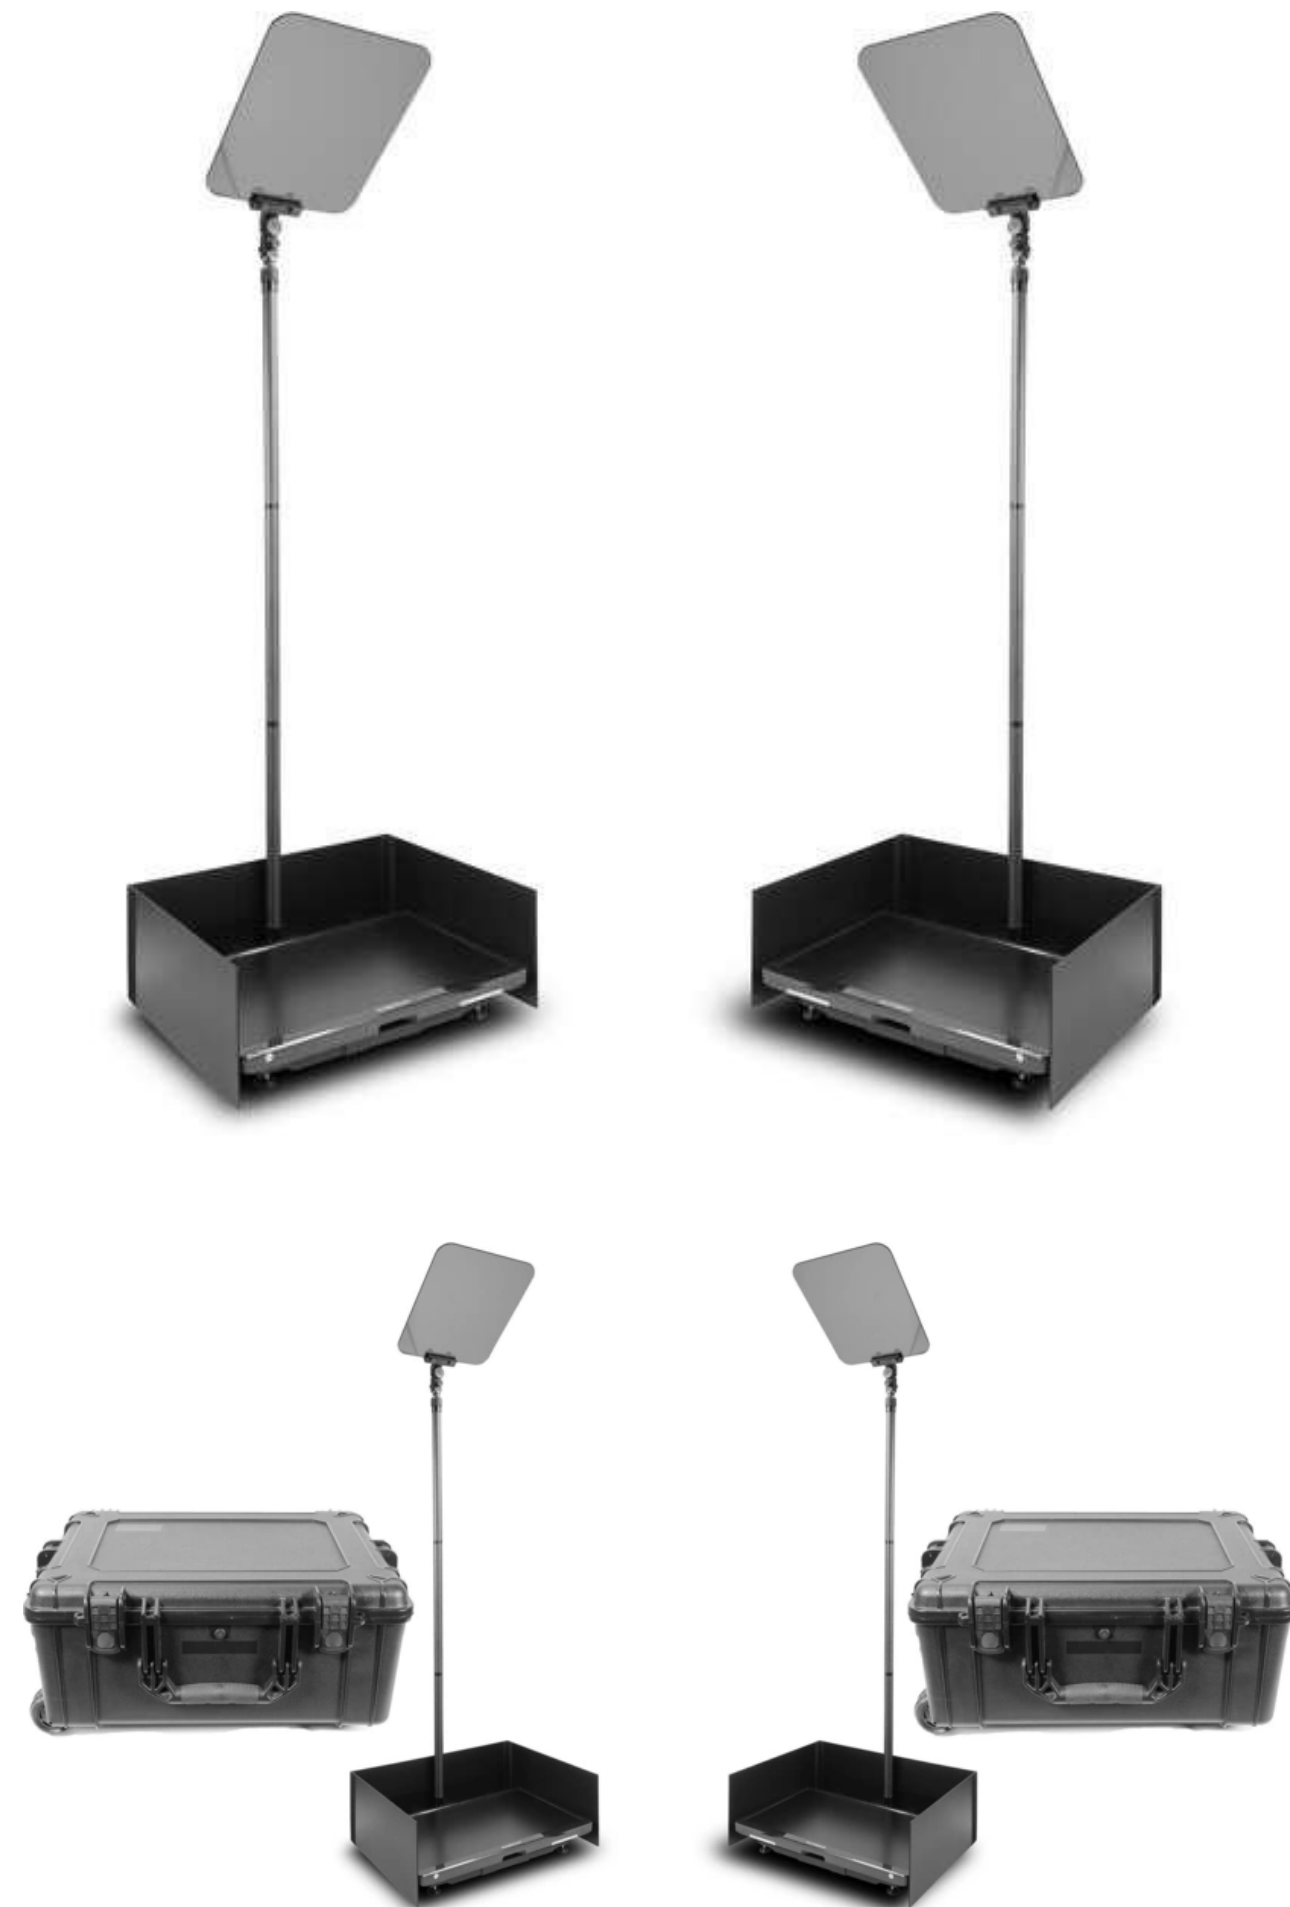

## Key Features:

- Easily Readable to over 17'
- Mac and PC Software Included
- 2 x Support Poles
- Two Small Carrying Cases
- The Prompter People ProLine StagePro 24" Carbon Fiber Presidential Teleprompter Set is an ultra-adjustable, easy-to-use setup, featuring two 3-piece poles for easy transit and storage. The 400cd/m<sup>2</sup> monitors are self-reversing and offer HDMI, VGA, and composite inputs and can display text with either the included Flip-Q Pro

# APC40 mkii



Provides hands-on control of Ableton LiveSeamlessly integrates 1 to 1 with Ableton Live (v9.1.3+)  
5x8 clip-launch matrix with RGB feedback for clip status and color coding9 channel faders,  
8 control knobs, and 8 device controls interface with Ableton LiveUSB-powered and plug-and-play  
connectivity for Mac and PC8 send busesAssignable A/B crossfader  
for dynamic mixing on the flyShift button and directional arrows manipulate the scope of the gridRevised  
knob layout with in-line controls for streamlined workflowProduction package included: Ableton Live Lite  
with Puremagnetik Effect Racks, Hybrid 3 by AIR Music Tech, SONiVOX Twist, Prime Loops sample packs,  
and Toolroom Records artist launch packs (downloads)

# MICRO CUE



The MicroCue3 brings ease of use, reliability and control to the world of the small to medium presentation. A single MicroCue3, offers three USB ports to control three computers, using separate front panel buttons that also show the status of that connection. An LCD screen shows the cues of the taught handsets, the signal strength, and just as important, the battery condition of the handset itself.

- 3x USB ports
- Selection of laser or non laser handsets
- Selection of 2 button - Next and Back or 3 button - Next, Back and Blackout buttons.
- LCD display for clear cues
- Signal strength and battery condition icons
- Audible cue via headphone socket
- Rugged cube design
- Fully CE and FCC compliant
- 3 Years limited factory warranty
- Pro Kit complete with power supply and hard case





# led screen applications



**APEX  
EVENTS**

# LIVE EVENTS - STAGES



**APEX  
EVENTS**

# CONFERENCE



# PERIMETER SCREEN / SPORTS



# CURVE SCREEN



**APEX  
EVENTS**

# 360 DEGREE / CIRCULAR SCREEN



# LED SCREEN ENTRANCE ARCH



**APEX**  
EVENTS

The logo for Apex Events is centered on the left side of the image. It consists of a white circle with a yellow border, which is itself inside a larger grey circle with a yellow border. The text 'APEX' is written in a bold, black, sans-serif font above 'EVENTS', which is also in a bold, black, sans-serif font. A small orange square is positioned between the 'P' and 'E' in 'APEX'.

**APEX  
EVENTS**

**thank  
you**

**ZONE 54, AL WAAB STREET NO: 625, BUILDING NO: 120  
OFFICE NO: F05 & F06 SPORT ACCELERATOR, ASPIRE ZONE**

**M: +974 3383 4548, +974 77716660, T : +974 4412 0030, F : +974 4412 0330**

**events@apexqatar.com | www.apexqatar.com**